

0 0 1


--

•

•


•


•

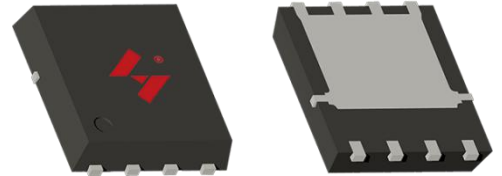

•

•







	
---	--







0 0 1

1

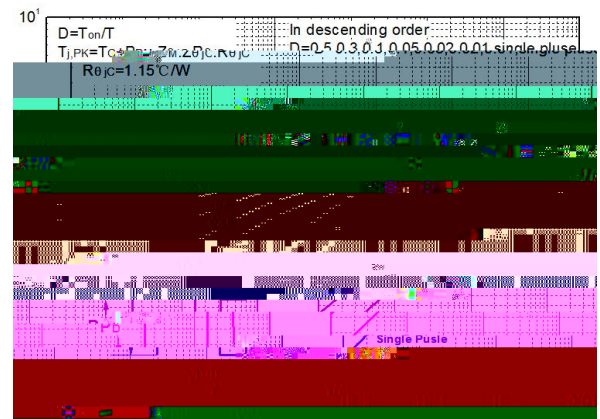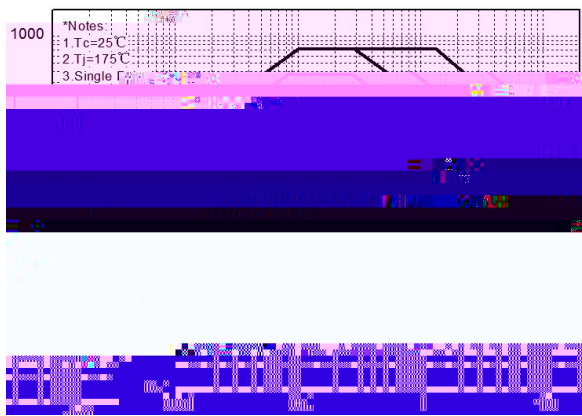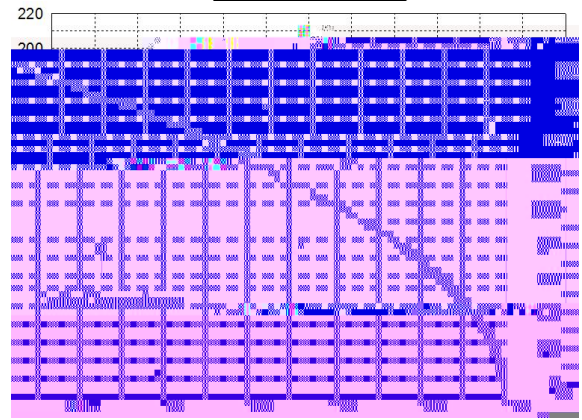
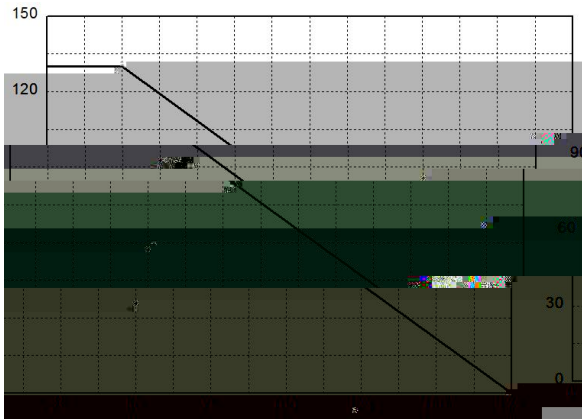


Maximum Effective Transient Thermal Impedance Junction Case

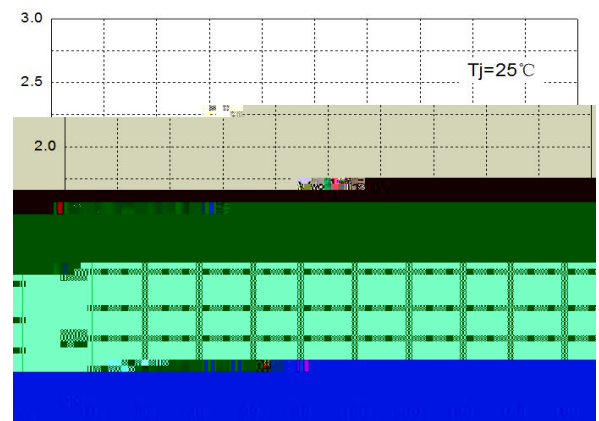
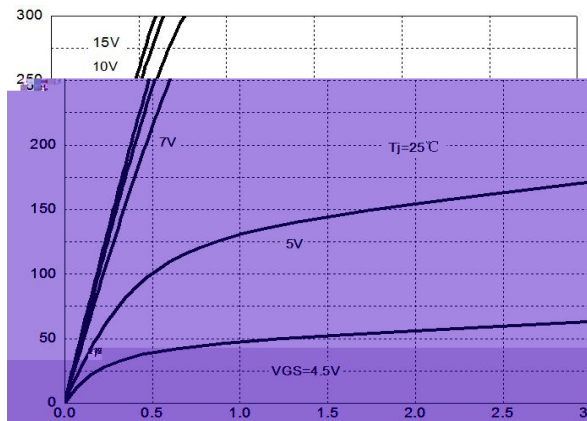



0 0 1

( . )


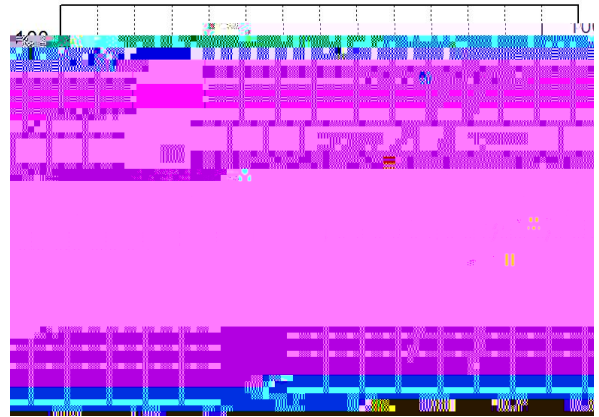
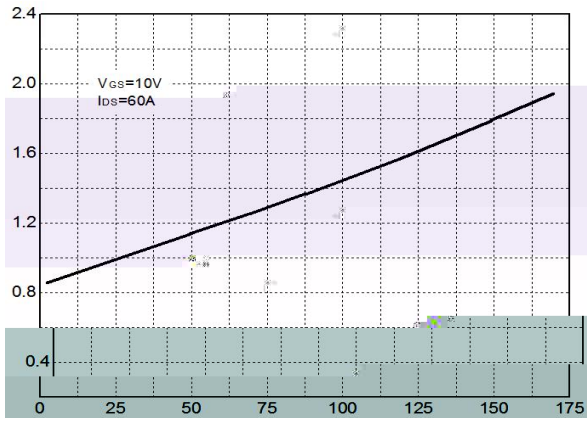


10

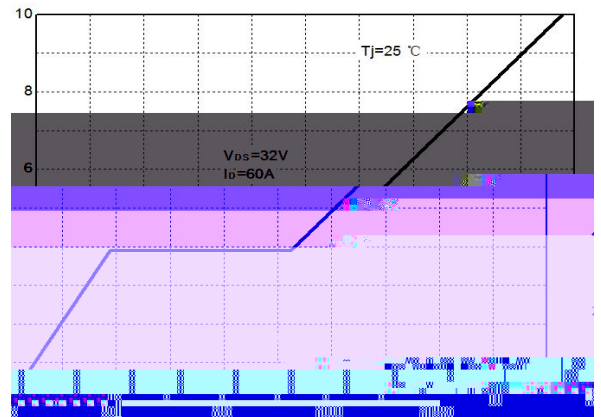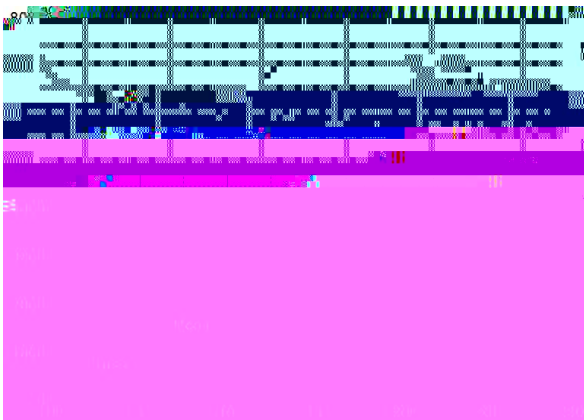


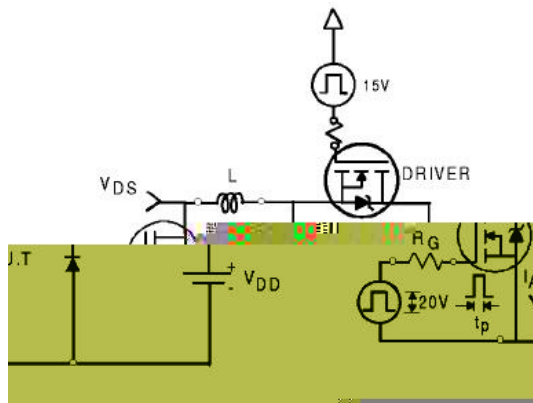



$$E_{AS} = \frac{1}{2} L I_{AS}^2$$

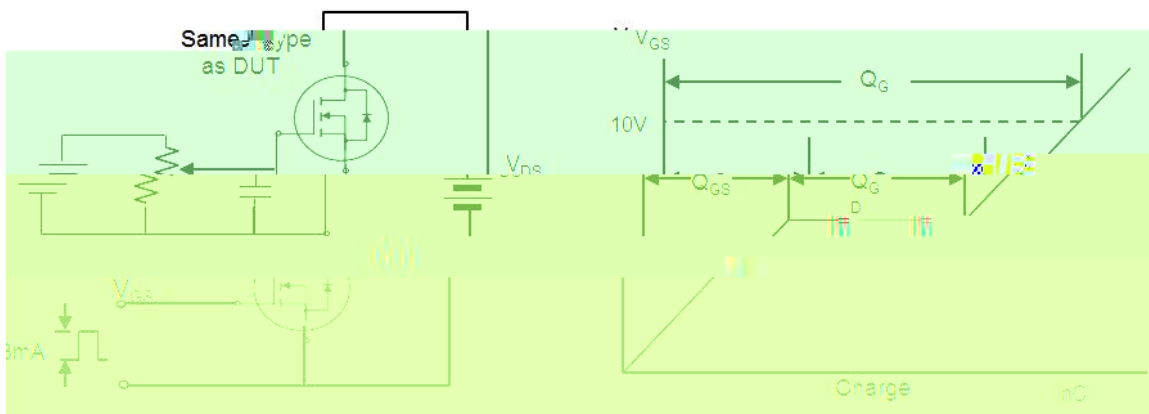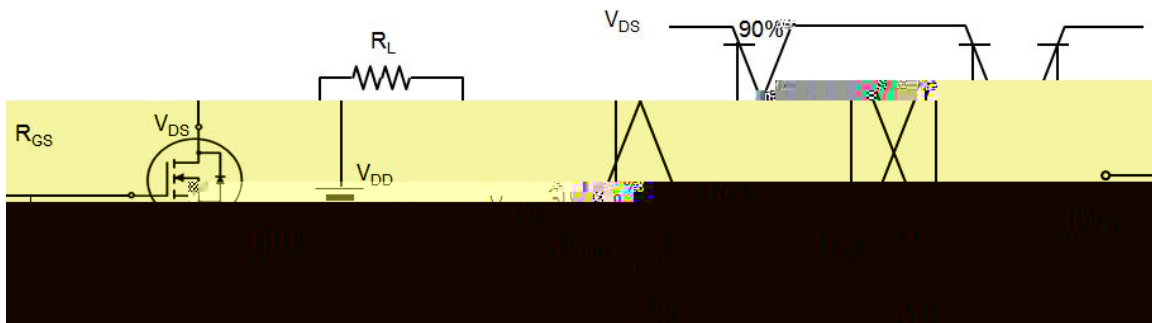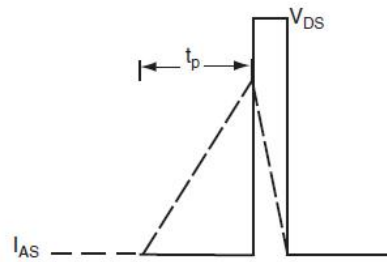

0 0 1


(

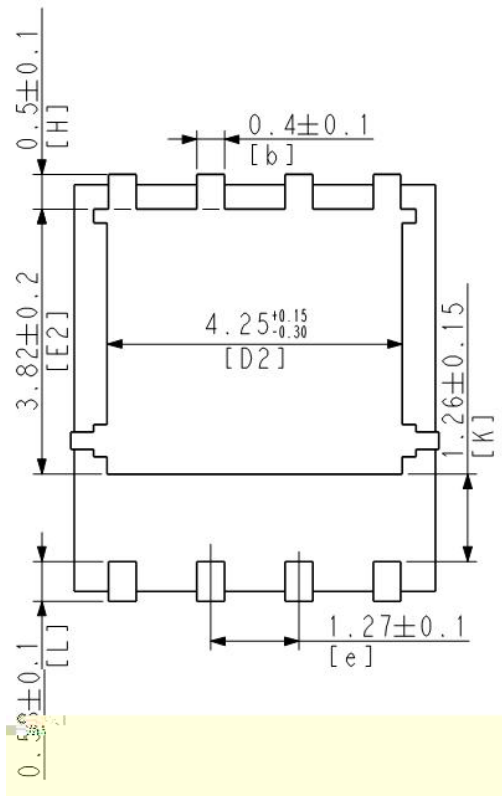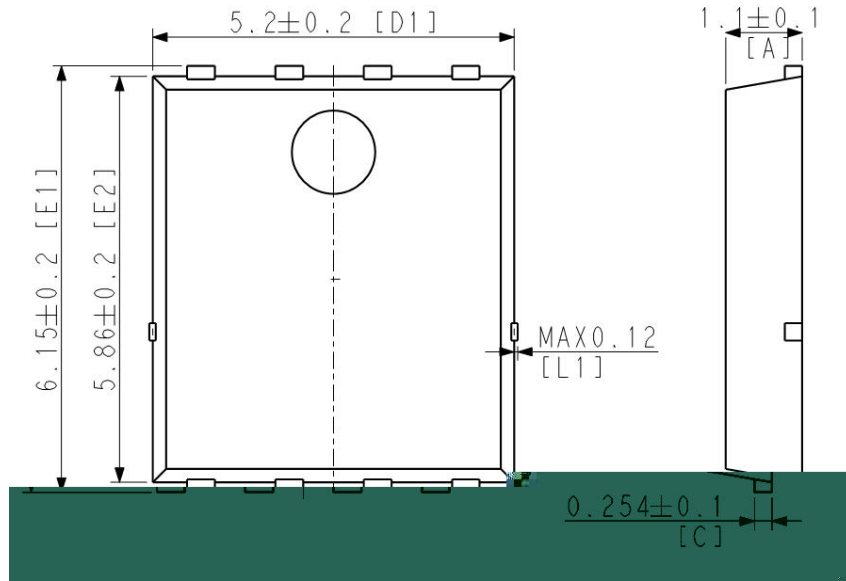

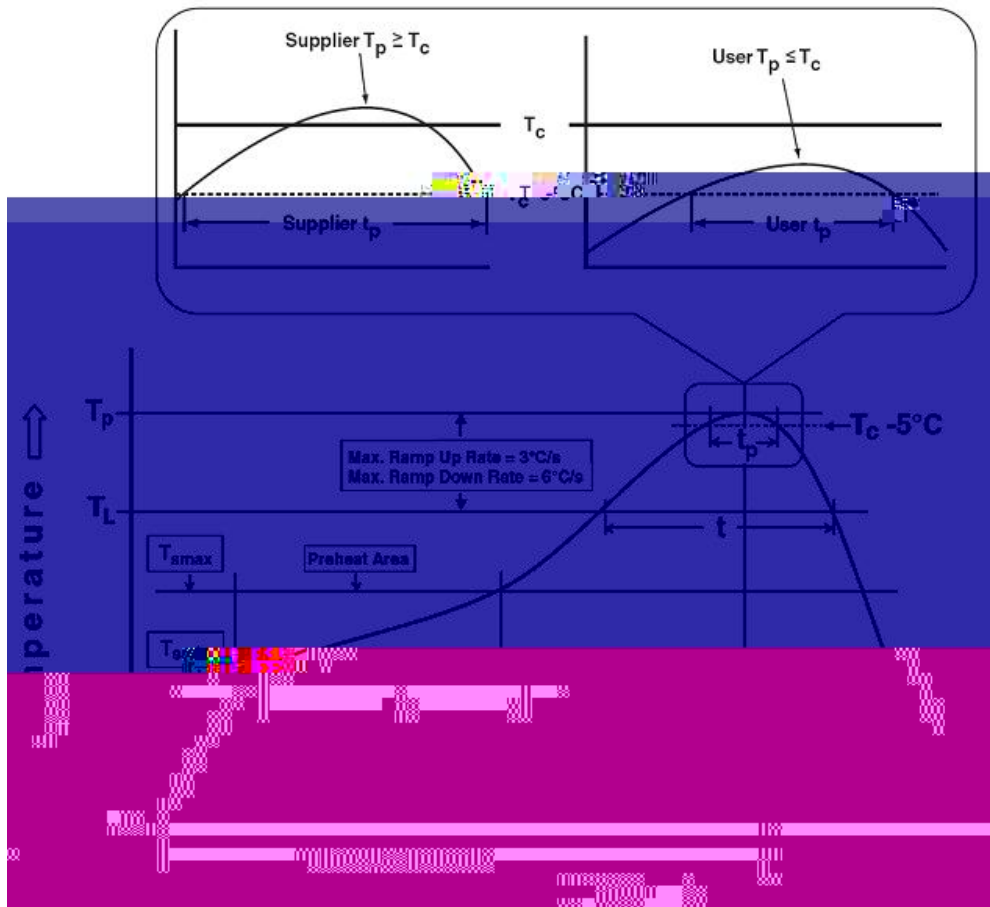

	-	-
&		



