





•



()			
	()		
θ			
θ			





()

()				
()				



()


()						
()						

%

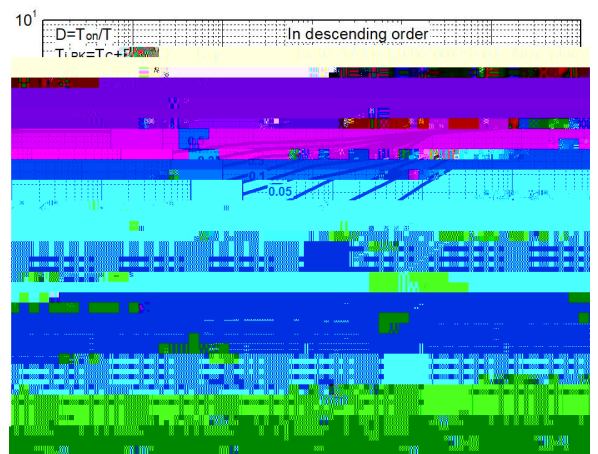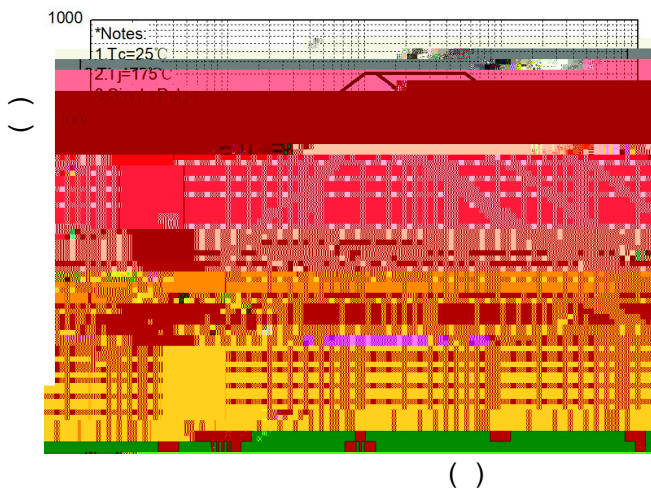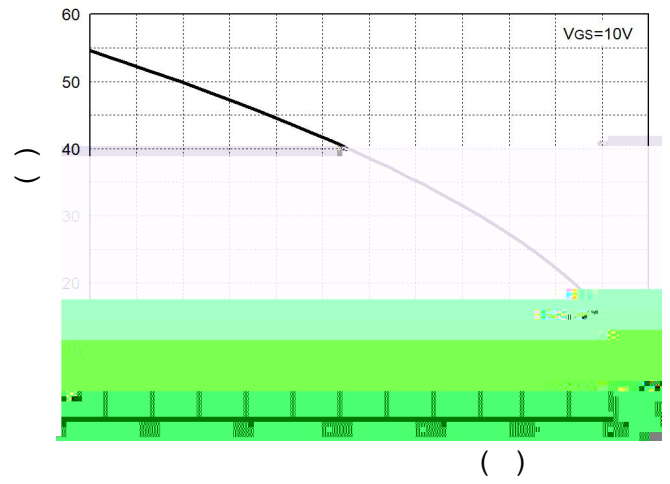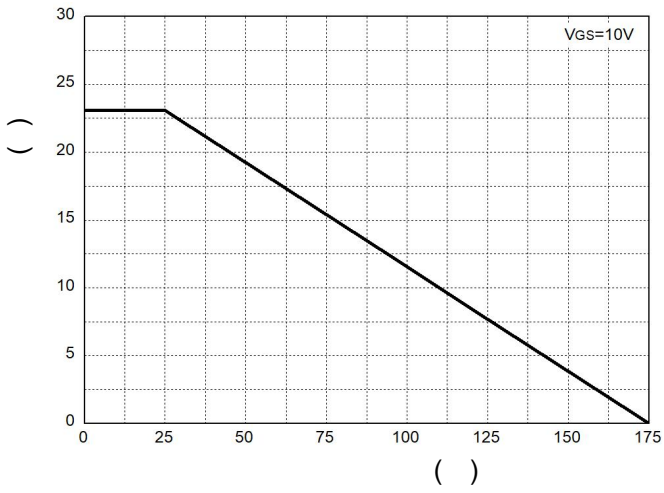


Maximum Effective Transient Thermal Impedance, Junction-to-Case

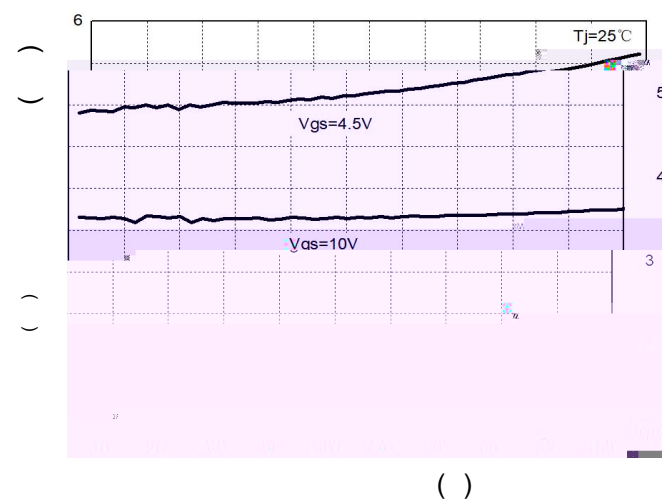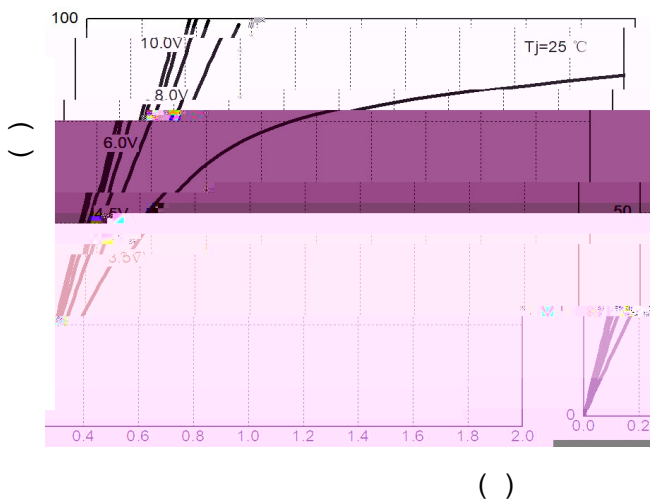


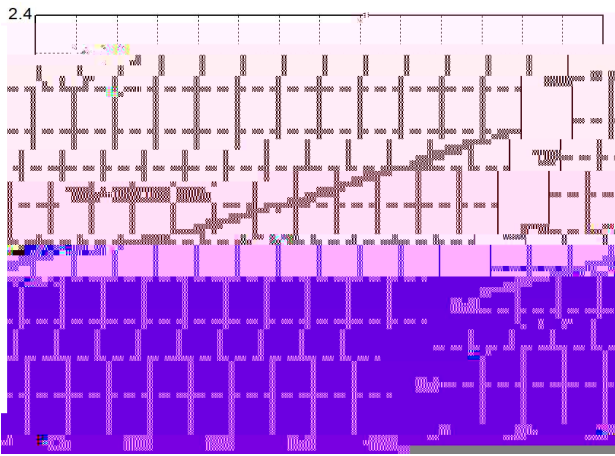


()

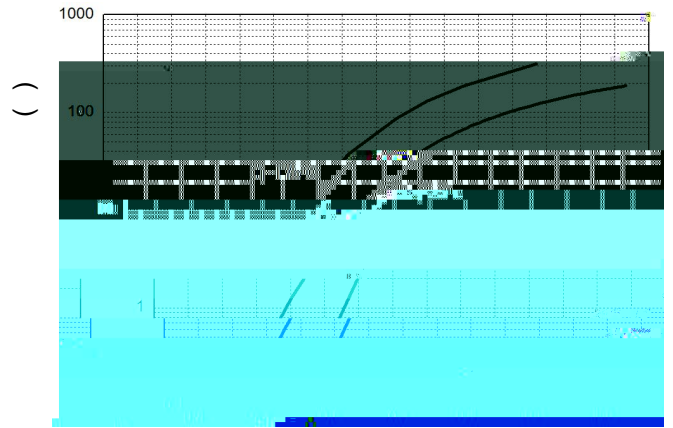







()

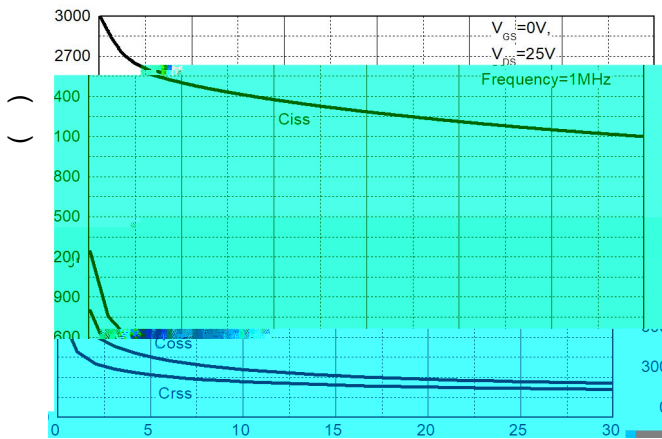


()

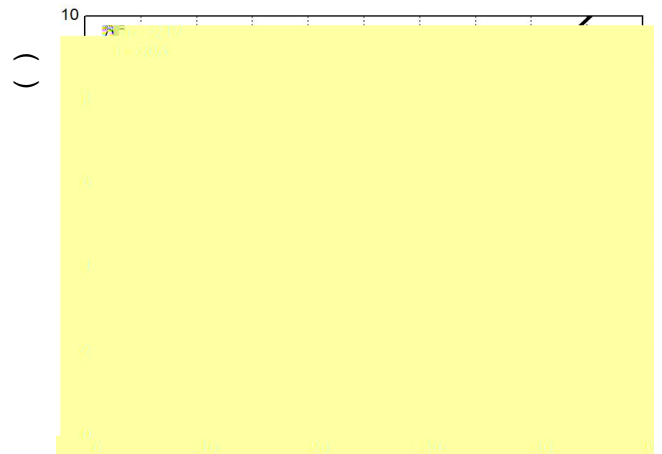


()

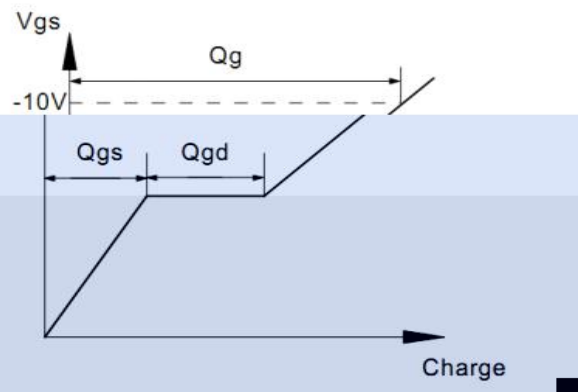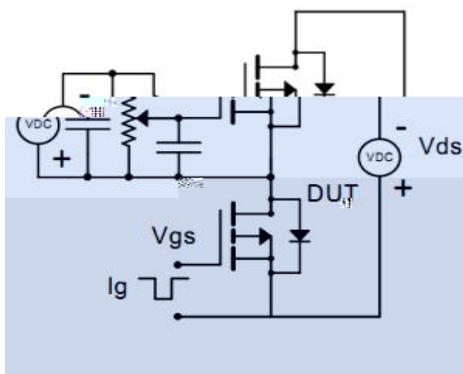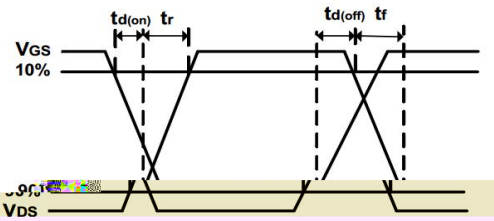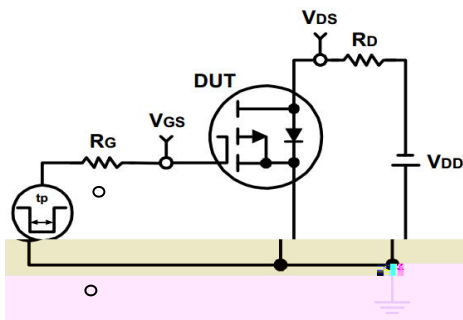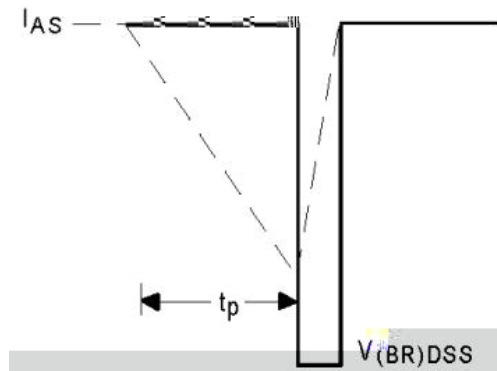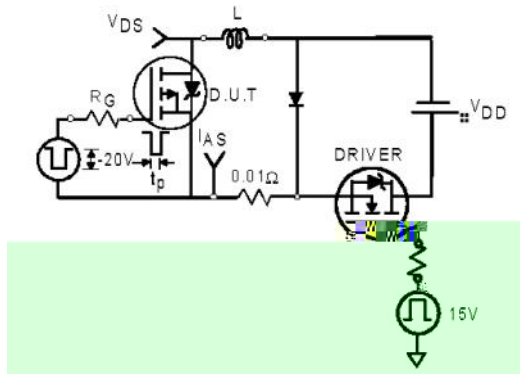

()		

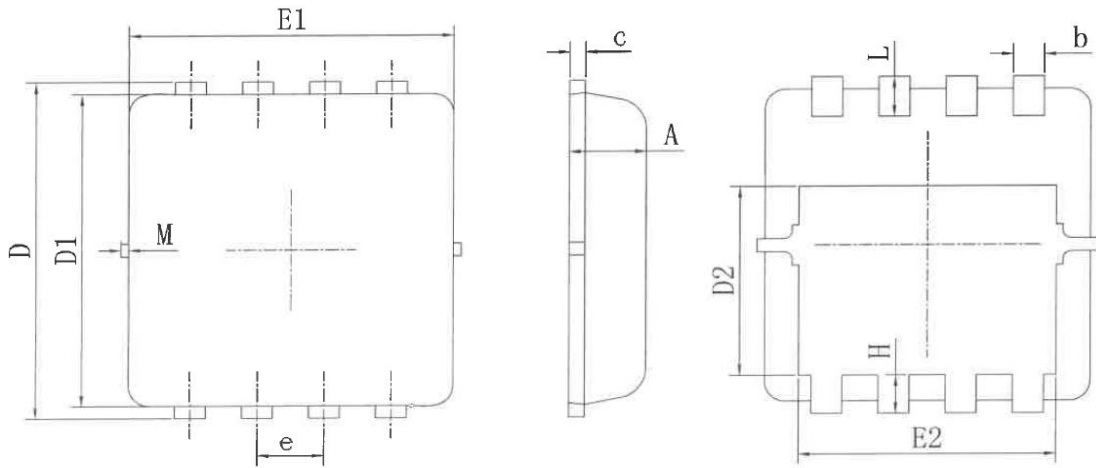

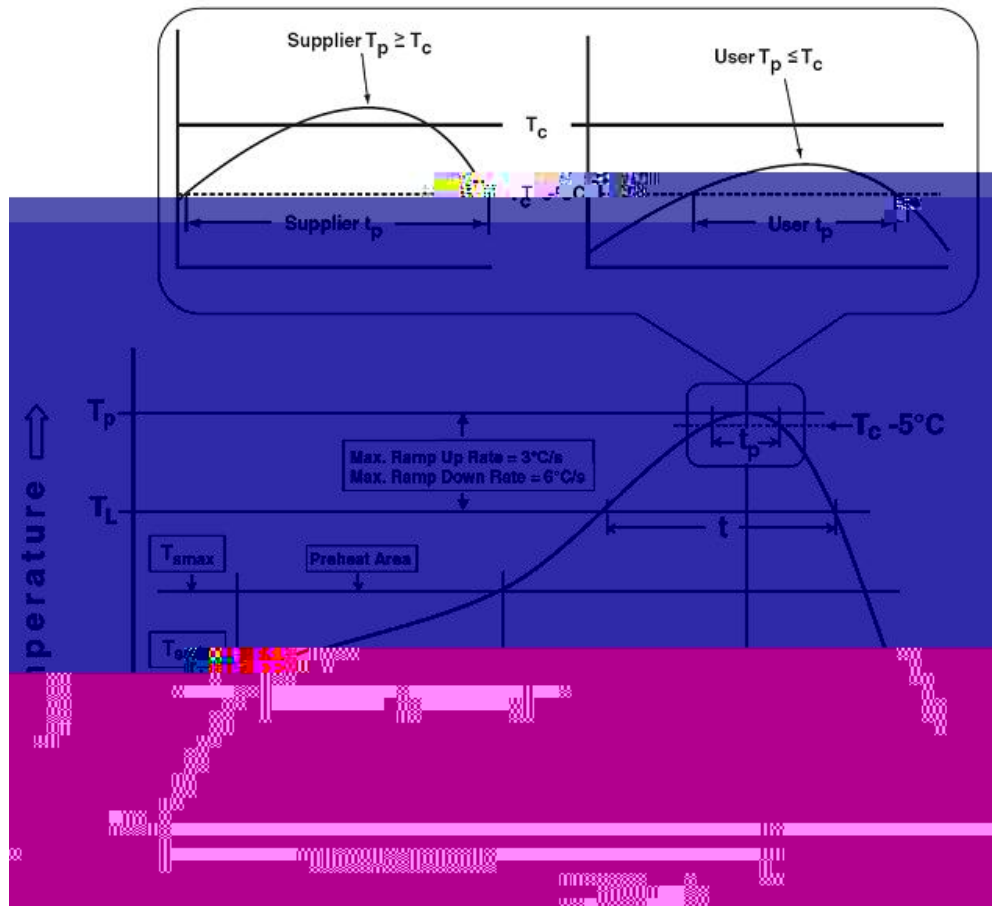

()		
()		
() ()		
()		
() ()		
()		
()		
() ()		
() ()		
()		
() ()		
()		
() ()		
()		
() ()		

()

()

		%
		%
		%

()
()